


## TR40VA040

Transformer, 40VA, 240/208/120 to 24 Vac, Dual Terminal Secondary, Foot and Single Threaded Hub Mount



Class II



Mounting Plate Included





Functional Devices, Inc. A600B 2004

### GENERAL SPECIFICATIONS

**VA Rating:** 40VA  
**Frequency:** 50/60 Hz  
**Mounting:** Foot & Single Threaded Hub  
**Over Current Protection:** Thermal Fuse  
**Dimensions:** 2.88" x 2.20" x 2.70"  
(w/ .5" NPT Hub)  
**Wire Length:** 8" Typical w/ .5" Strip  
**Operating Temperature:** -30 to 140° F  
**MTBF:** 100,00 Hours @ 77° F  
**Construction:** Split-Bobbin  
**Weight:** 1.96 lbs.  
**Approvals:** Class II UL1585 Listed, US / Canada

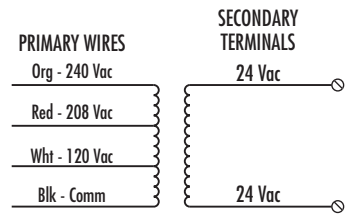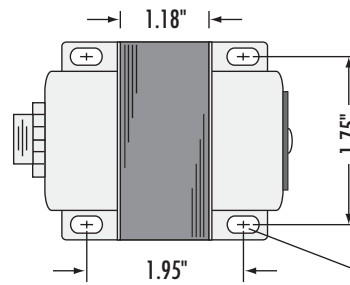

Mounting Hole = .320" x .175"

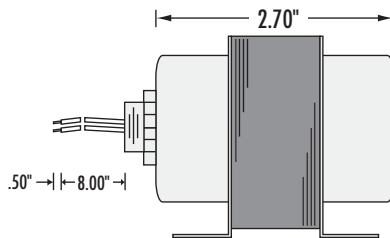

### NOTES: